

## Radon Inspection Report

**Test Location:**



**Test For:**



**Inspected By:**

Billy Boerner  
222. S. Meramec Ave.  
Clayton, MO 63105

Bldg. Type: Residential Single Family

Type: Pre-Mitigation

### Test Result: Pass

Overall Average:

**1.1 pCi/l**

**Test Device Details:**

Serial Number: 300001542  
Model Number: 1028XP  
Last Calibration: 08/18/2021  
Next Calibration: 08/18/2022  
Cal-Factors: 2.82  
Motion Error: No

**Test Site Condition:**

Condition: Overcast  
Structure Type: Residential

**Test Summary:**

<u>CRM Location:</u>	<u>Start:</u>	<u>Stop:</u>	<u>Interval:</u>	<u>Duration:</u>
Basement	03/10/2022 03:33 PM	03/12/2022 03:33 PM	1 hr	48 hr
	<u>Min:</u>	<u>Max:</u>	<u>Average:</u>	<u>Measurement Units:</u>
Radon Concentration:	0.0	2.5	1.1	pCi/l
Temperature	64.4	72.1	70.5	F
Humidity	18	37	24	%
Pressure	29.52	29.79	29.62	inHg

**Comments:**


*Billy Boerner*

Lic/Cert Signature

Inspection Report Date: 03/14/2022

Test device manufactured by SunRADON, LLC

## Radon Inspection Chart

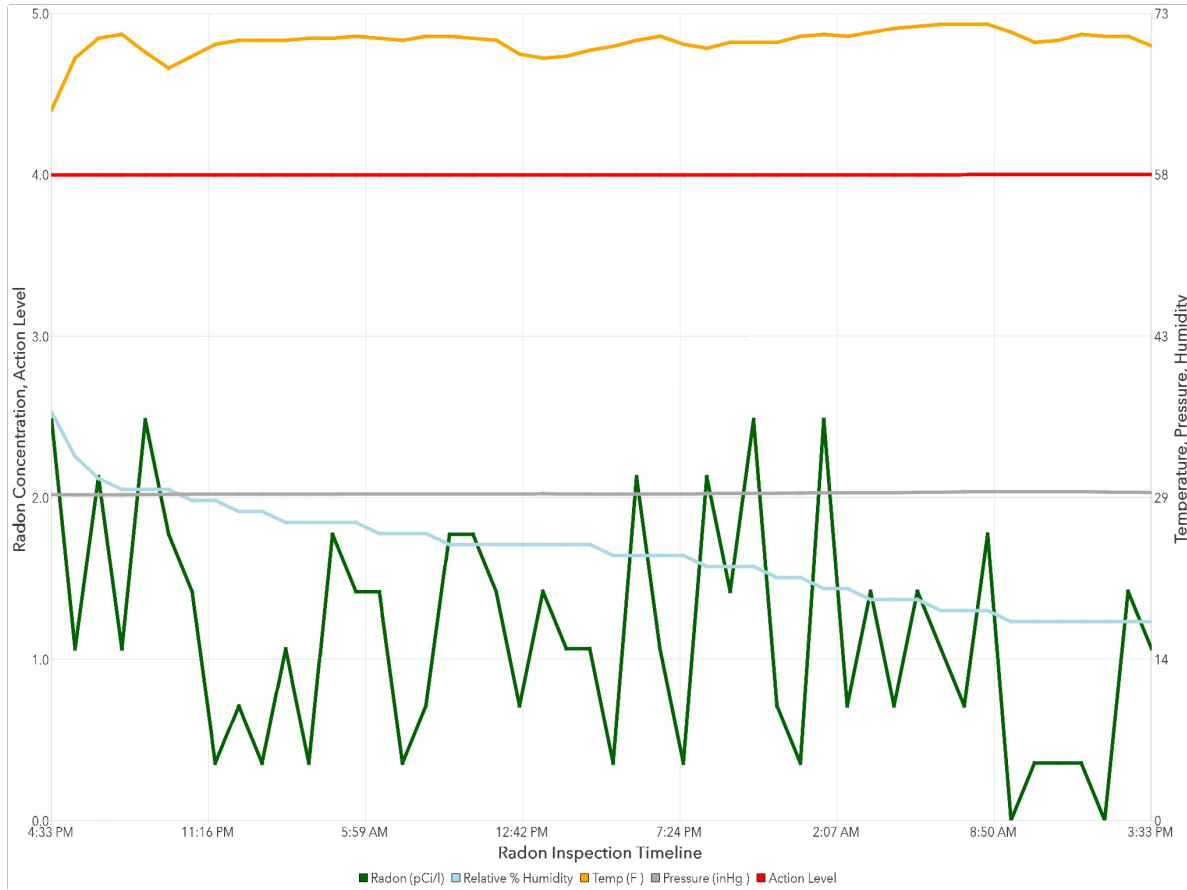

**Test Result: Pass**

Test Location



Inspection Report Date: 03/14/2022

Test device manufactured by SunRADON, LLC

---

## Test Checklist

---

- The location of the detector was selected so the detector was not to be disturbed during testing.
  
- The monitor was not placed in an area of high humidity such as: Kitchen, laundry room, cellar, spa room, garage, crawl space or sump area.
  
- The detector was not located near drafts caused by HVAC vents, windows and doors.
  
- The detector was not placed near areas of excessive heat, such as a fireplace or in direct sunlight.
  
- Portable window fans were removed or sealed in place prior to testing.
  
- The detector was placed within the breathing zone of at least 20 inches to 6 feet above the floor and at least 1 foot below the ceiling if suspended.
  
- The detector was not placed within 1 foot of outside walls of the home or within 3 feet of any windows or doors to the exterior of the home.

---

**Test Result: Pass**

**Test Location** 

**Inspection Report Date:** 03/14/2022

---

Test device manufactured by SunRADON, LLC



Unbiased Ancillary Inspections

Home Scan Pros  
222. S. Meramec Ave.  
Clayton, MO 63105

### Test Table

Date/Time	Radon(pCi/l)	Temp(F)	Pres(inHg)	Humidity(%)	Flags
03/10/22 04:33 PM	2.5	64.4	29.53	37	-
03/10/22 05:33 PM	1.1	69.1	29.52	33	-
03/10/22 06:33 PM	2.1	70.9	29.52	31	-
03/10/22 07:33 PM	1.1	71.2	29.52	30	-
03/10/22 08:33 PM	2.5	69.6	29.53	30	-
03/10/22 09:33 PM	1.8	68.2	29.54	30	-
03/10/22 10:33 PM	1.4	69.3	29.55	29	-
03/10/22 11:33 PM	0.4	70.3	29.55	29	-
03/11/22 12:33 AM	0.7	70.7	29.55	28	-
03/11/22 01:33 AM	0.4	70.7	29.55	28	-
03/11/22 02:33 AM	1.1	70.7	29.55	27	-
03/11/22 03:33 AM	0.4	70.9	29.55	27	-
03/11/22 04:33 AM	1.8	70.9	29.55	27	-
03/11/22 05:33 AM	1.4	71.1	29.56	27	-
03/11/22 06:33 AM	1.4	70.9	29.58	26	-
03/11/22 07:33 AM	0.4	70.7	29.59	26	-
03/11/22 08:33 AM	0.7	71.1	29.60	26	-
03/11/22 09:33 AM	1.8	71.1	29.60	25	-
03/11/22 10:33 AM	1.8	70.9	29.61	25	-
03/11/22 11:33 AM	1.4	70.7	29.61	25	-
03/11/22 12:33 PM	0.7	69.4	29.61	25	-
03/11/22 01:33 PM	1.4	69.1	29.60	25	-
03/11/22 02:33 PM	1.1	69.3	29.57	25	-
03/11/22 03:33 PM	1.1	69.8	29.55	25	-
03/11/22 04:33 PM	0.4	70.2	29.55	24	-
03/11/22 05:33 PM	2.1	70.7	29.55	24	-
03/11/22 06:33 PM	1.1	71.1	29.56	24	-
03/11/22 07:33 PM	0.4	70.3	29.57	24	-
03/11/22 08:33 PM	2.1	70.0	29.60	23	-
03/11/22 09:33 PM	1.4	70.5	29.62	23	-
03/11/22 10:33 PM	2.5	70.5	29.63	23	-
03/11/22 11:33 PM	0.7	70.5	29.64	22	-
03/12/22 12:33 AM	0.4	71.1	29.65	22	-
03/12/22 01:33 AM	2.5	71.2	29.67	21	-
03/12/22 02:33 AM	0.7	71.1	29.68	21	-
03/12/22 03:33 AM	1.4	71.4	29.68	20	-
03/12/22 04:33 AM	0.7	71.8	29.69	20	-
03/12/22 05:33 AM	1.4	72.0	29.71	20	-
03/12/22 06:33 AM	1.1	72.1	29.74	19	-
03/12/22 07:33 AM	0.7	72.1	29.76	19	-
03/12/22 08:33 AM	1.8	72.1	29.78	19	-
03/12/22 09:33 AM	0.0	71.4	29.78	18	-
03/12/22 10:33 AM	0.4	70.5	29.79	18	-
03/12/22 11:33 AM	0.4	70.7	29.79	18	-

**Test Result: Pass**

Test Location 

Inspection Report Date: 03/14/2022

Test device manufactured by SunRADON, LLC



Unbiased Ancillary Inspections

Home Scan Pros  
222. S. Meramec Ave.  
Clayton, MO 63105

---

### Test Table

---

<u>Date/Time</u>	<u>Radon(pCi/l)</u>	<u>Temp(F)</u>	<u>Pres(inHg)</u>	<u>Humidity(%)</u>	<u>Flags</u>
03/12/22 12:33 PM	0.4	71.2	29.77	18	-
03/12/22 01:33 PM	0.0	71.1	29.75	18	-
03/12/22 02:33 PM	1.4	71.1	29.72	18	-
03/12/22 03:33 PM	1.1	70.2	29.70	18	-

---

**Test Result: Pass**

**Test Location** 

**Inspection Report Date:** 03/14/2022

---

Test device manufactured by SunRADON, LLC

---

## Radon Test Information

---

### Radon Risk Information

Radon causes lung cancer by means of the decay of its daughter products after breathing in air contaminated with higher levels of Radon. The World Health Organization (WHO) estimates that 15% of lung cancers worldwide are caused by exposure to elevated indoor levels of Radon. Overall, radon is the second leading cause of lung cancer responsible for about 21,000 lung cancer deaths every year in the US alone. Radon gas is the number one cause of lung cancer among non-smokers. The U.S. Environmental Protection Agency (EPA), the U.S. Surgeon General, and the Center for Disease Control and Prevention (CDC) strongly recommend that ALL homebuyers have an indoor radon test performed prior to purchase or taking occupancy and recommend having the radon levels professionally mitigated if elevated radon concentrations are found.

### Understanding Radon Test Results

Recommended Action Levels vary by country and typically range from 3 pCi/l (100 Bq/m<sup>3</sup>) to 8 pCi/l (300 Bq/m<sup>3</sup>). Recommendations below are based on test results by a Continuous Radon Monitor (CRM) Test of at least 48h duration and are based on recommendations by the EPA.

Measured Average Radon Level:

- At or above 4.0 pCi/l (148 Bq/m<sup>3</sup>): Corrective measures to reduce exposure to radon gas is strongly recommended (ANSI MAH2014)
- Between 2-4 pCi/l (74-148 Bq/m<sup>3</sup>): Consider mitigation or periodic retest as indoor Radon levels vary by season and weather conditions
- Below 2 pCi/l (74 Bq/m<sup>3</sup>): Consider bi-annual retest or whenever significant changes to the home structure or mechanical systems occurred

---

**Test Result: Pass**

Test Location 

Inspection Report Date: 03/14/2022

---

Test device manufactured by SunRADON, LLC